

Data Sheet

Fast Modulator MSM 100-50

Features

Drives arbitrary current waveforms into laser diodes
 CW, pulsed, modulated or mixed curves
 Short rise and fall time
 Two analog inputs plus BIAS current
 Small dimensions, low weight

Specification

Diode current CW	0 ... 100 A
Diode current pulsed	0 ... 200 A (short pulses)
Diode voltage	0 ... 49 V
Output power	4900 W max
Power dissipation	150 W max allowed
Supply voltage	1 V ... 49 V
Supply current	100 A max
Supply voltage*	3 V ... 6 V
Rise time	10 μ s
Fall time	10 μ s
Frequency (set point 1)	50 kHz max
Frequency (set point 2)	50 kHz max

Inputs

Diode current set point 1	0 ... 500 mV (50 Ohm input)
Diode current set point 2	0 ... 5 V (high impedance)
Enable	TTL
Reset	TTL

Outputs

Diode current monitor	0 ... 55 mV (into 50 Ohm)
Temperature	0 ... 4 V for 0 ... 80°C
Ready	TTL
Excess temperature	TTL


General specifications

Ambient temperature	0 ... +45 °C
Cooling	Required
Dimensions	95 x 61 x 20 mm
Weight	240 g
Ordering Code	10100518

* for internal electronics

Description

The fast diode current modulator MSM 100-50 is a linear modulator with improved properties for driving arbitrary current waveforms or fast pulses into laser diodes. Current waveforms can be CW, pulsed, modulated or mixed with frequencies up to 50 kHz and currents up to 100 A for CW and 200 A for pulsed waveforms. The modulator is small and compact and it is designed for mounting with low inductance at laser diodes or for integrating in laser diode modules. It has two analogue inputs for the current set point: a high frequency input (50 Ohm input impedance) with a bandwidth of 50 kHz and a low frequency input with a bandwidth of 50 KHz. Additionally there is a 10 turns potentiometer for generating a CW-current (bias current). All set points are added and build the effective current set point. Technical subjects to change without notice.

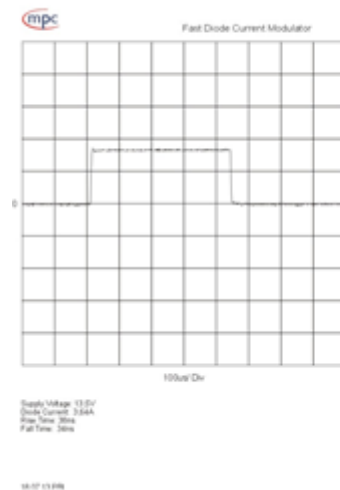

Warning!

**Risk of exposure of hazardous laser radiation
 in combination with laser light emitting devices!**